



ta: -20°C
...+45°C




200V-240V ~50/60Hz	79W	2x 3800 lm	4000K	CRI>80	69,2 x 195 x 31 cm	17,10 kg
--------------------	-----	------------	-------	--------	--------------------	----------



EN

INSTRUCTION MANUAL PART A
Floor lamp


1007988
1007989
1007994

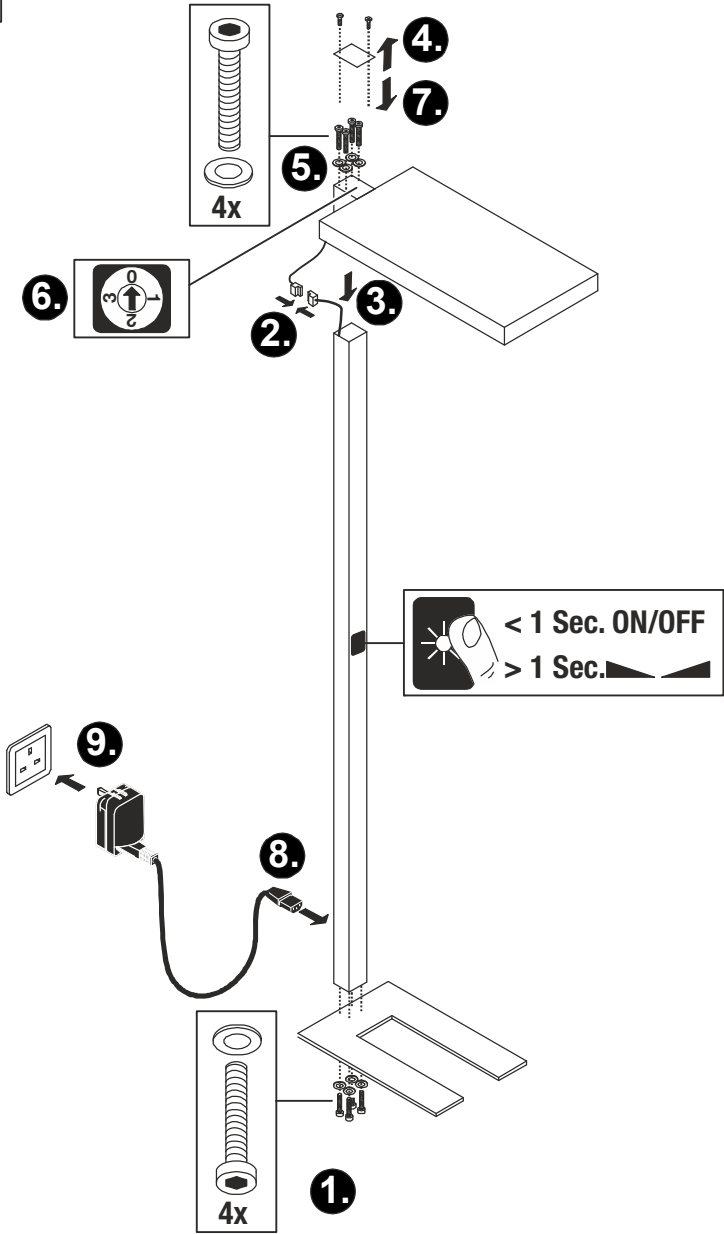

0	✗	✗	
1	✓	✗	
2	✓	✓	
3	✗	✓	



EN - The installation requires expert knowledge and may be carried out only by an approved electrician under consideration of local and national regulations!



EN - The light source is only replaceable by a professional. The control gear is not replaceable.

Technical Details are subject to change.

UK CA SLV UK
Unit E Chiltern Park
Boscombe Road, Bedfordshire
LU5 4LT

EN Operating Manual PART B Floor Stand Luminaire 1007988 ...89 ...94

Read manual carefully and keep for further use!

⚠ Safety advices for installation and operation.
Disregard may lead to danger of life, burning or fire!

Do not alter or modify the product.

Do not fasten anything on the product.

Do not cover the product.

Take out of service when suspecting a defect or malfunction and contact your dealer or a qualified electrician.

Take measures that children get not harmed by the product.

The external flexible cable is of a special type and may only be replaced by the same type. This special cable is available at your specialist dealer.

Do not stare into the active light source.

Additional safety advices = ⚠

Use as directed

Safety class I (1) ⚡. Connection with protective conductor.

Operate only on an even, stable and tilt-fixed surface.

Operate only in dry indoor area.

Do not strain mechanically or expose to strong dirt contamination.

Admissible ambient temperature(ta): -20°C ...+45°C.

Light Source

The light source of this luminaire may only be replaced by the manufacturer, an authorized service technician or a comparable qualified person.

This product contains a light source of the energy efficiency class E.

Care / Storage

⚠ Disconnect product from mains and let it cool down.

Clean external surfaces regularly with a slightly moistened (water) cloth.

Store dry and clean.

Installation

It is recommended to assemble the product in a lying position.

Install as shown in the figure.

Placement

Place in a way that product poses no danger(e.g. stumbling).

Putting into service

Connect mains plug with mains plug socket.

Motion Sensor

After 30 min. of no motion detection the brightness is reduced to 30%.

After another 30 min. of no motion detection the light is switched off.

As soon as a motion is detected the light switches to the adjusted brightness.

Daylight Control

When the daylight control is running, the light keeps the adjusted brightness on the illuminated surface regardless of the surrounding light.

⚠ Check for secure standing and proper function!