




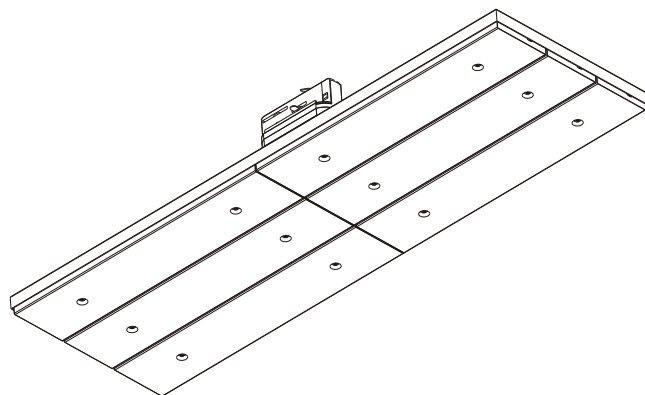

1 Remove the power box and take out the power supply

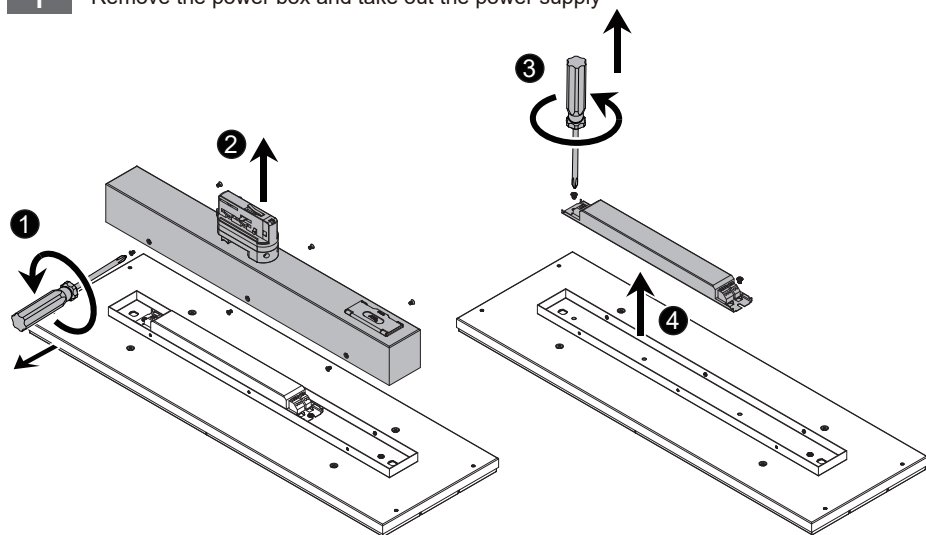

2 Remove the lens and take out the PCB board

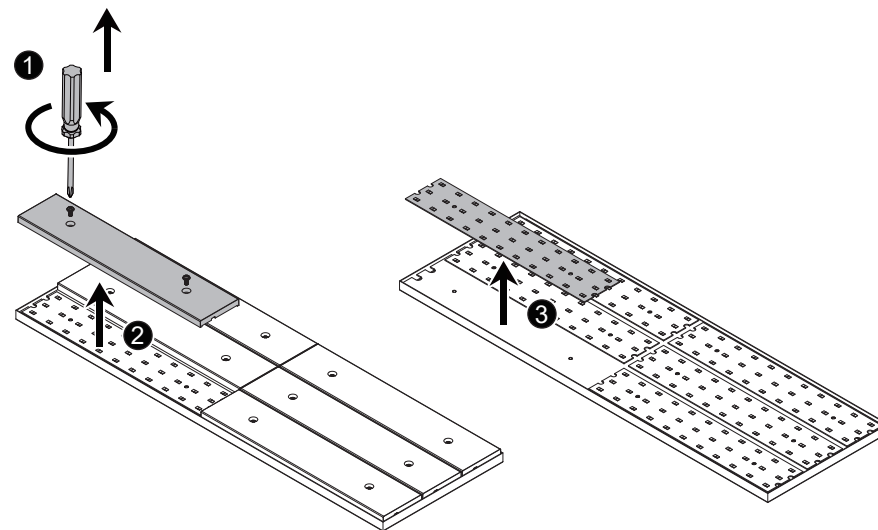

3 The disassembled driver and light source

