









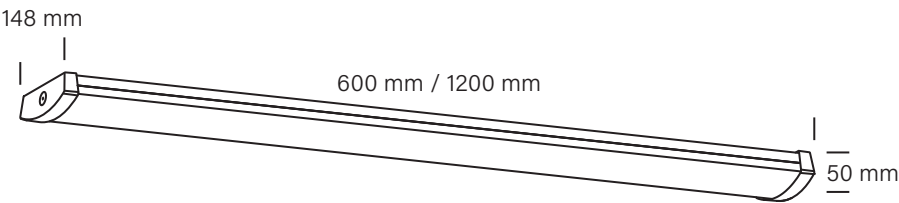


ECOtech Batten 600 mm

10W	1300-1330 Lumen	12	xxx
13W	1600-1650 Lumen		
16W	1950-2200 Lumen		
20W	2300-2350 Lumen		

ECOtech Batten 1200 mm



20W	2500-2700 Lumen	6	xxx
24W	3000-3100 Lumen		
35W	4500-4600 Lumen		
40W	5000-5100 Lumen		



This product contains a light source in energy efficiency class D

Find the updated manual on our website – nordtronic.com
With reservation for typing errors


Nordtronic A/S | Silovej 8, 12th floor | DK-9900 Frederikshavn | Denmark | CVR: 29808708
Tel: +45 7020 9531 | nordtronic.com

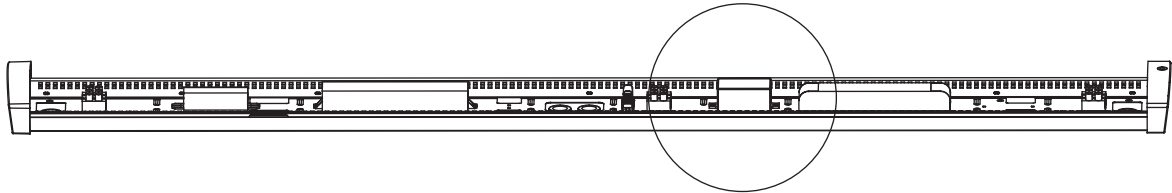

Factory settings		
Detection area	Hold time	Daylight sensor
100%	1 min	25 Lux

Detection area		
1	2	
ON	ON	100%
ON	-	75%
-	ON	50%
-	-	25%

Adjust the sensor combinations by using the DIP Switches as indicated below

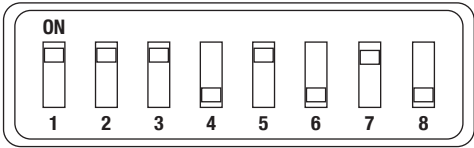

Hold time			
3	4	5	
ON	ON	ON	55
ON	ON	-	30 s
ON	-	ON	1 min
ON	-	-	3 min
-	ON	ON	5 min
-	ON	-	10 min
-	-	ON	20 min
-	-	-	30 min

Daylight sensor			
6	7	8	
ON	ON	ON	2 Lux
ON	ON	-	10 Lux
-	ON	-	25 Lux
ON	-	-	50 Lux
-	-	-	Disable

