


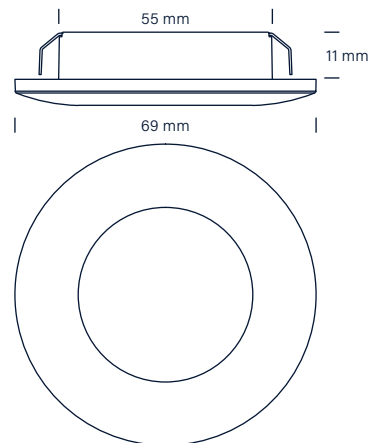


Technical data

Amperage	350mA
System effect	3.2W
Light source	LED, EPREL ID 2611580 E
Colour temperature	2700 / 3000 Kelvin CCT switch
Light intensity	290 / 300 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours
Dimmable	Depends on driver
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	100°
Cut out	Ø55 mm
Installation height	11 mm
Exterior dimension	Ø69 mm, H: 17 mm
Spring terminal	0.5 - 0.75 mm ²
IP rating, front / back	IP44 / IP20
Insulation class	Class III
Material	Aluminium, plastic
Environment	Indoor
Warranty	5 years
Approvals	CE, RoHS

Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Connector on the lamp housing
- Dimmable with Nordtronic LED driver
- Incl. 3 meter cable with plug in both ends

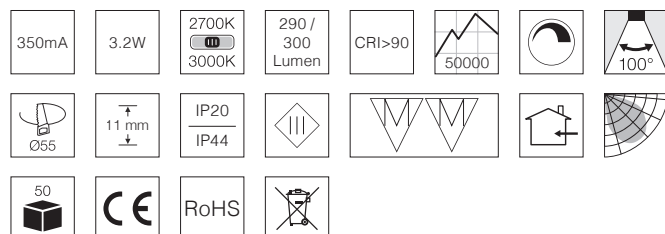

Item no.	EAN no.	Design, colour	Environment
3009885	5704629006997	○ matt white (RAL 9016)	Indoor
3009886	5704629007000	○ brushed alu	Indoor

Mounting ring

Item no.	EAN no.	Design, colour	Environment
3009887	5704629007017	○ matt white (RAL 9016)	Indoor
3009888	5704629007024	○ brushed alu	Indoor

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.