


Wattage setting


A ON / OFF

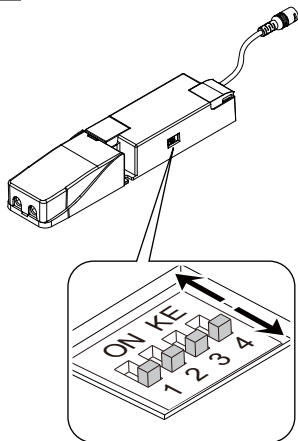

Article No.: 1010121, 1010123, 1010578
1010580, 1010713, 1010716

| mA | 1 | 2 | 3 | 4 | Power(W) |
|------|-----|-----|-----|-----|----------|
| 500 | OFF | OFF | OFF | OFF | 18 |
| 550 | ON | OFF | OFF | OFF | 19 |
| 600 | OFF | ON | OFF | OFF | 21 |
| 650 | OFF | OFF | ON | OFF | 23 |
| 700 | ON | OFF | ON | OFF | 24 |
| 750 | OFF | ON | ON | OFF | 26 |
| 800 | OFF | OFF | OFF | ON | 28 |
| 850 | ON | OFF | OFF | ON | 30 |
| 900 | OFF | ON | OFF | ON | 32 |
| 950 | OFF | OFF | ON | ON | 33 |
| 1000 | ON | OFF | ON | ON | 35 |
| 1050 | OFF | ON | ON | ON | 37 |
| 1100 | ON | ON | ON | ON | 39 |

B DALI

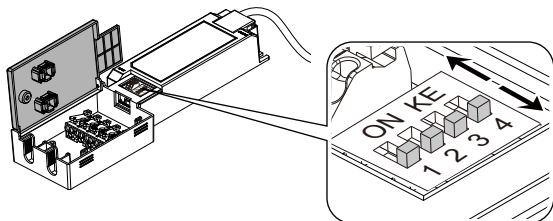

Article No.: 1010122, 1010124, 1010579
1010581, 1010714, 1010715

| mA | 1 | 2 | 3 | 4 | Power(W) |
|------|-----|-----|-----|-----|----------|
| 600 | OFF | ON | ON | ON | 22 |
| 650 | ON | OFF | ON | ON | 24 |
| 700 | OFF | OFF | ON | ON | 26 |
| 750 | OFF | ON | OFF | ON | 27 |
| 800 | OFF | OFF | OFF | ON | 29 |
| 850 | ON | ON | ON | OFF | 31 |
| 900 | OFF | OFF | ON | OFF | 33 |
| 950 | OFF | ON | OFF | OFF | 34 |
| 1000 | ON | OFF | OFF | OFF | 36 |
| 1050 | OFF | OFF | OFF | OFF | 38 |

Pavanno Installation Manual



IMPORTANT SAFETY NOTES




WARNING

RISK OF ELECTRIC SHOCK

BEFORE YOU BEGIN

- Read these instructions completely and carefully.
- The installation and connection of the luminaire must be done when switched off and by qualified people. Make sure no voltage while installation.




CAUTION

MAINTENANCE

- To avoid injuries, disconnect power to the light and allow the unit to cool down before performing maintenance.
- Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on an annual basis. Frequency of use and environment should determine this.
- The Covers should be cleaned periodically as needed to ensure continued photometric performance. Clean the Cover with a damp, non-abrasive, lintfree cloth. If not sufficient, use mild soap or a liquid cleaner. Do not use an abrasive, strong alkaline or acid cleaner as damage may occur.
- Inspect the topside on the luminaire to ensure that it is free of any obstructions or contamination (i.e.excessive dust build-up). Clean with a non-abrasive cloth if needed.

Products

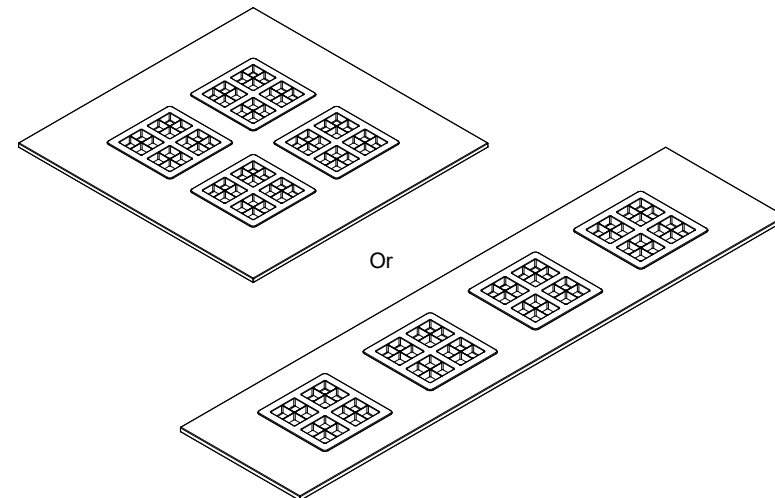

Dimensions [mm]

595 / 620
10
595 / 620
20
1195
10
20
295

Optional Driver

ON / OFF

DALI

Installation Steps

1 Remove the ceiling drywall

2 Place the luminaire on the keel frame

3 Connecting Driver

"Click"

Installation Steps

4 CCT setting:

5-a Connecting Power Supply ON / OFF

5-b Connecting Power Supply DALI

3 Wires specification:

Outer diameter: $\varnothing 8\text{mm} \leq C \leq 10\text{mm}$
Core of cable: $3 \times 0.75 \sim 2.5\text{mm}^2$

5 Wires specification:

Outer diameter: $\varnothing 8\text{mm} \leq C \leq 10\text{mm}$
Core of cable: $5 \times 0.75 \sim 1.5\text{mm}^2$

8...10mm
40-55mm
N L
N L
N L
N L
N L
N L
N L
N L