



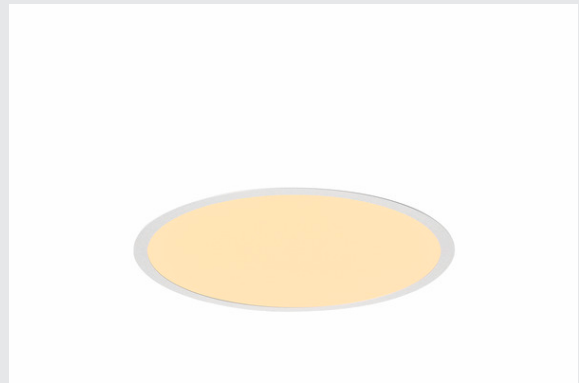

MEDO 40 EL

LED indoor recessed ceiling light, frame version,
white, 3000/4000K

The MEDO FRAME variants round off the recessed lights in the MEDO series. The MEDO FRAME lights blend into any room perfectly, just like the frameless versions. Understated yet still powerful, they provide bright illumination. Supplemented by an additional driver, the TRIAC recessed variant becomes dimmable and can be integrated in DALI systems.



Tekniske data

Item no.	1001906
IP klasse	IP20
Montering	Recessed
Monterings detaljer	Ceiling
Sekundær strøm / spænding	700mA
IP Tæthedsgard	III
Watt	28 W
Max omgivelsestemperatur	40 °C
Lumen	3100/3300 lm
Farvetemperatur	3000/4000 Kelvin
Spredningsvinkel	105 °
Farve	white
CRI	80
UGR ≤	25
LXXBXX-data	L70B50
Højde	10.2 cm
Diameter	40 cm
Nettovægt	2.431 kg
Bruttovægt	3.53 kg
Indbygningsdybde	13 cm
Installations diameter	39 cm
BIG WHITE side	171

Lyskilde

916346	
--------	---

Tilbehør

1006120	LED driver , 40W 700/900/1000mA
1005446	LED driver , 40W 700mA PHASE
1004781	LED driver , 21-29.5W 500/600/700mA
1006196	LED driver , 40W 700mA DALI dimmable with RF interface LED driver white DALI
1002424	LED driver MEDO 400 , dimmable DALI/1-10V