
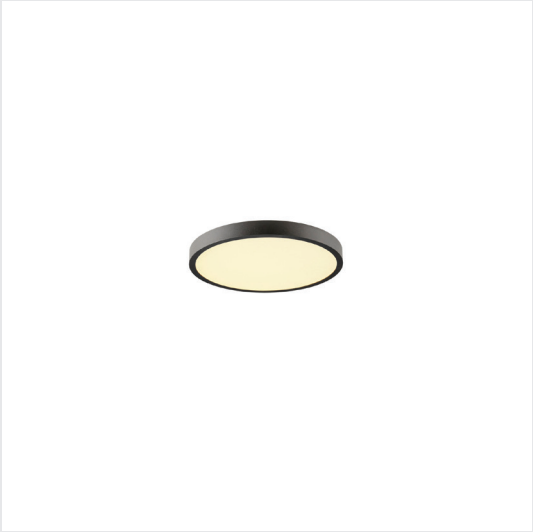


MEDO 2 SLIM 30 | CL, PHASE

MEDO 2 SLIM 30, CL, PHASE, Ceiling Surface-Mounted Luminaire, 3000/4000 K, 8 W, 85°, black

The MEDO 2 SLIM 30 is a surface-mounted ceiling luminaire designed for general indoor lighting in residential and commercial spaces. It features phase-cut dimming, allowing flexible light control. With a power consumption of 8 watts and a choice of 3000 or 4000 Kelvin colour temperature, it provides pleasant illumination. The beam angle is 85 degrees, ensuring even light distribution. The housing is made of aluminium and steel, with a diameter of 29.5 centimetres and a height of 4.9 centimetres. The luminaire has an IP20 protection rating and meets impact resistance class IK03, making it robust against mechanical impacts.



Item no.	1011693
Lamps included	No
IP Code	IP20
Impact resistance class	IK03
Assembly	Surface
Assembly details	Ceiling,Wall,
Dimmable	true
Dimming technology	trailing edge
Number of through-wires	50
Primary nominal voltage	220-240V ~ 50/60Hz
Secondary power / voltage	200 mA
Safety class	I
Wattage	8 W
Maximum ambient temperature	45°C
Number of luminaires at LS B16A	56.0
Number of luminaires at LS C16A	118.0
Level of inrush current	5 A
Duration of inrush current	300 µs
Beam angle	85°
Color	black
CRI	90
UGR ≤	19
LXXBXX data	L80B10
Service life	100 000 h
Risk Group	0
Height	4.9 cm
Diameter	29.5 cm
Net weight	2.1 kg
Gross weight	3.1 kg

Accessories

1011779	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, black
1011780	MEDO 2 SUSPENSION KIT, 1.5 m Pendant Length, Central, white
1011781	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, black
1011782	MEDO 2 SUSPENSION KIT, 5 m Pendant Length, Central, white
1011783	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, black
1011784	MEDO 2 SUSPENSION KIT, 3 m Pendant Length, Parallel, white